

...



TNC-SVR01/TNC-SVR02

TNC-SVR0*

PRE-CONFIGURED MODULAR BASE STATION FOR THE RAPID IMPLEMENTATION AND ADJUSTMENT OF CONTROL SYSTEMS

Pre-configured modular base station with power supply units, relays and controllers, for the rapid implementation and adjustment of control systems

- Space saving, compact design
- All components are already wired to rail mount terminals
- Quick, error free assembly and installation
- Robust design
- With TROXNETCOM Basic User Software for rapid and safe commissioning and configuration
- Integral display, also for operation

Application




Application

- Pre-configured AS-i base stations for repeaters (TNC-A2225), with an AS-i power supply unit TNC-A1256 = 2.8 A or TNC-A1258 = 8 A
- Installed and wired to rail mount terminals
- Plastic casing, free of halogens, with transparent cover
- Allows for AS-i cable extension by 100 m

TECHNICAL INFORMATION

AS-i pre-configured switch boxes TNC-SVR01, TNC-SVR02

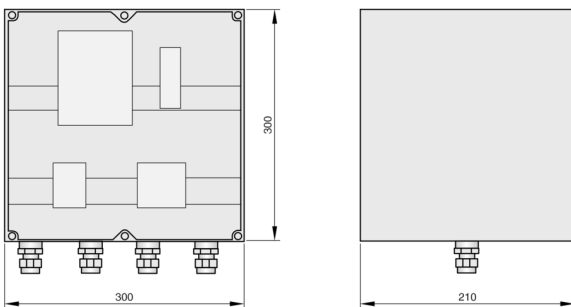


...

Description	TNC-SVR01/SVR02
Casing dimensions (B x H x T)	300 x 300 x 210 mm
Casing material	Plastic, free of halogens, with transparent cover
Wired components	TNC-SVR01: 1 x TNC-A2225; 1 x TNC-A1256; TNC-SVR02: 1 x TNC-A2225; 1 x TNC-A1258
Mains supply	230 V AC, 50 Hz
Max. power consumption	TNC-SVR01: 0.1 KW; TNC-SVR02: 0.24 KW
Pre fuse	20 A
Protection level	IP 65

Standard description (characteristics)

Switch box 'Repeater'

- Dimensions: 300 x 300 x 210 mm
- Casing materials: Plastic, free of halogens, with transparent cover
- Components: installed and wired to rail mount terminals
- Cable glands: M20 with clamping bracket for mains cable and AS-i bus cable
- Mains supply: 230 V AC, 50 Hz
- Repeater: TNC-A2225
- Power supply unit: TNC-A1256 = 2.8 A (TNC-SVR01) or TNC-A1258 = 8 A (TNC-SVR02)
- Type: TNC-SVR0*

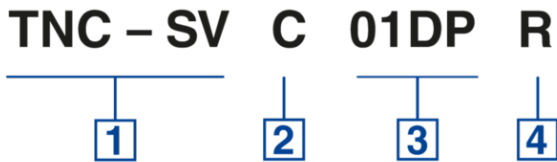

1 Type

TNC-SV Configured switch cabinet

2 Type of base station

R Repeater
C Controller
D Display

3 Components

Repeater (R)
01 1xTNC-A2225, 1xTNC-A1256
02 1xTNC-A2225, 1xTNC-A1258

Controller (C)
01DP 1xTNC-A1305, 1xTNC-A1256, 1xTNC-D1020
02DP 1xTNC-A1305, 1xTNC-A1258, 1xTNC-D1020
03DP 1xTNC-A1306, 2xTNC-A1256, 1xTNC-D1020
04DP 1xTNC-A1306, 2xTNC-A1258, 1xTNC-D1020
01MB 1xTNC-A1353, 1xTNC-A1256, 1xTNC-D1020
02MB 1xTNC-A1353, 1xTNC-A1258, 1xTNC-D1020
03MB 1xTNC-A1354, 2xTNC-A1256, 1xTNC-D1020
04MB 1xTNC-A1354, 2xTNC-A1258, 1xTNC-D1020

Display (D)
TP043 1xTP043N, 1xTNC-D1030
TP057 1xTP057N, 1xTNC-D1030
TP104 1xTP104N, 1xTNC-D1030
TP121 1xTP121N, 1xTNC-D1030

4 Relay module

For controllers only (C)
No entry: no relay module
R 1xTNC-Z0094
RR 2xTNC-Z0094

...

TROX UK Ltd



Caxton Way,
Thetford, Norfolk, IP24 3SQ, UK
Tel: +44 (0) 1842 754545
Fax: +44 (0) 1842 763051

General Enquiries –
info@troxuk.co.uk
Sales & Customer Services – sales@troxuk.co.uk
Accounts –
accounts@troxuk.co.uk

Online-Services

- › [TROX Academy](#)

- › [Your contact partner](#)

- › [Our Office London](#)

- › [Our Office Thetford](#)

Service-Hotlines

Sales:
+44 (0)1842 754545
[Contact](#)

Service:
+44 (0)1842 754545
[Contact](#)

Technical service
+44 (0)1842 754545
[Contact](#)

TROX SOCIAL MEDIA
