



{249}

TNC-D4011

SWITCHING POWER SUPPLY UNIT FOR 24 V SUPPLY

Controlled power supply for sensors, actuators, sensor electronics and controller

- High efficiency of > 84 %
- Input and output with overvoltage protection
- Can be attached to a mounting rail, no tools required
- Output voltage adjustable up to 28 V DC
- Overload protection, up to 1.5 × nominal current
- Very high efficiency, hence very low heat buildup
- LED for secondary voltage

General Information


Application

- Switching power supply unit TNC-D4011 (24 V DC; 3.3 A)
- Power supply for AS-i controllers as well as for operating and display units
- Very high efficiency of 89.8 %
- Low ripple voltage, < 0.25 mV
- High reliability

TECHNICAL INFORMATION

Description	TNC-D4011
Output current	3.3 A
Nominal voltage	< 230 V AC
Input voltage range	100 – 240 V AC
Nominal frequency	47 – 64 Hz
Efficiency	89.8 %
TROX casing	Sheet steel
Protection level	IP 20
IEC protection class	II (protective earth)
Connection	Screw terminals
Temperature range	-25 – +70 °C
Derating	1.8 W/K (60 – 70 °C)
Output voltage	24 – 28 V DC (± 2 %) to SELV/PELV
Max. ripple voltage	50 mV
Mains buffering time	128 ms
Short-circuit protection / overload protection	Yes (to IEC 61140)
EMC	EN 61000-6-1; EN 61000-6-2; EN 61000-6-3; EN 61000-6-4; EN 61000-3-2
LEDs	DC OK; 1 × LED, green
Weight	569 g

Dimensions	120 × 40 × 128.5 mm
------------	---------------------

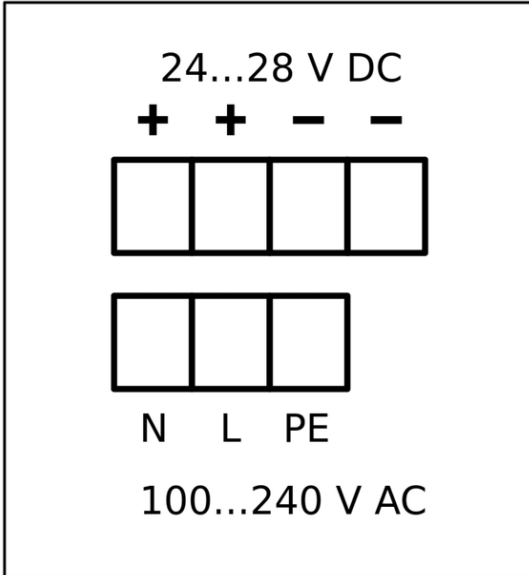

Specification text

- Switching power supply unit TNC-D4011 for supplying power to the controller or text display
- Nominal voltage: < 230 V AC
- Output voltage: 24 – 28 V DC ($\pm 2\%$), SELV/PELV
- Output current: 3.3 A
- Nominal frequency: 64 Hz
- Efficiency: 89.8 %
- Connection: screw terminals
- Casing materials: galvanised sheet steel
- Ambient temperature: -25 to +70 °C
- Protection level: IP 20
- Status display: DC OK, 1 × LED
- Make: TROX GmbH or equivalent
- Type: TNC-D4011

TNC

-
|
1

D1030

1 Type

TNC-D1030 Output current 1.25 A
TNC-D4011 Output current 3.3 A
TNC-D4012 Output current 5 A
TNC-D4013 Output current 10 A